



STORM MEDIUM MOON

datasheet



Project: Private Residence | Lighting design: Luc De Beir

The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Moon is designed to flush ceilings or walls. A soft light shines through the alabaster stone, and provides a pleasant light. A perfect solution for a night light.

GENERAL DATA

Collection

STORM SYSTEM®

Product

Storm Medium Moon

Article no.

- 1A01.0108.3265
- 1A01.0108.3266

SPECIFICATIONS

Weight

370g

Material

Aluminium and natural stone

Fixture finish

Alabaster

Please note: Natural stone - variations will occur

IP protection grade

IP20

Insulation class


Class III 

Labelling

CE

Safety distance

0,3m 

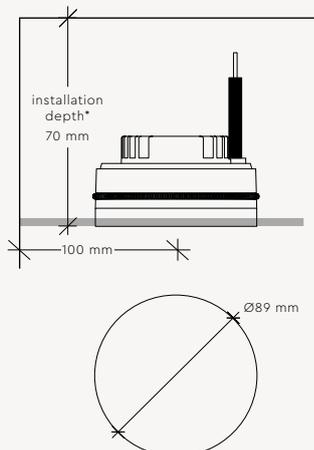

ELECTRICAL SPECIFICATION

1A01.0108.3265 - DIM

Light Source LED constant current (included)
 Supply 5W | 33V | 130mA
 CCT 2500K (nature stone - variations can occur!)
 IES/LDT Review - LUXFILES 



Additional requirements: (not included)

Driver 1AD.420PC20.DS | Phasecut
 1AD.300DA12.DS | Dali
 1AD.420DA20.DS | Dali

Installation depth

70mm (remote driver)

1A01.0108.3266 - DIM TO WARM

Light Source LED constant current (included)
 Supply 5W | 33V | 130mA
 CCT 2500 - 2000K (nature stone - variations can occur!)
 IES/LDT Review - LUXFILES 



Additional requirements: (not included)

Driver 1AD.420PC20.DS | Phasecut
 1AD.300DA12.DS | Dali
 1AD.420DA20.DS | Dali

Installation depth


70mm (remote driver)

LOCAL DRIVER - Installation depth

If installation requires a locally positioned LED driver, please review chart below.

ATTENTION! installation must be carried out by an authorized installer, in accordance with national legislation

| SYSTEM → | MEDIUM | | | | |
|------------------|------------------------------|----------------------------------|---------------------------|-----------------------------------|-------------------------------|
| | PLASTER RING 1A01.0001.01 | ACOUSTIC ADAPTOR 1A01.0090.00 | TRIM RING 1A01.0003.xx | BACK-MOUNTED RING 1A01.0048.xx | BACK 007 RING 1A01.0047.04 |
| 1AD.xxxPCxx | 90 mm | 90 mm | 90 mm | 90 mm | 90 mm |
| 1AD.420PC20.DS | 110 mm | 115 mm | 115 mm | 130 mm | 130 mm |
| 1AD.300DA12.DS | 90 mm | 100 mm | 100 mm | 110 mm | 110 mm |
| 1AD.1050DA15.420 | 90 mm | 100 mm | 100 mm | 110 mm | 110 mm |
| 1AD.420DA20.DS | 90 mm | 100 mm | 100 mm | 110 mm | 110 mm |
| 1AD.500DA20.DS | 110 mm | 115 mm | 115 mm | 130 mm | 130 mm |
| 1AD.CV24xx24 | 110 mm | 115 mm | 115 mm | 130 mm | 130 mm |
| 1AD.CV24DA120 | remote | remote | 220 mm | remote | remote |

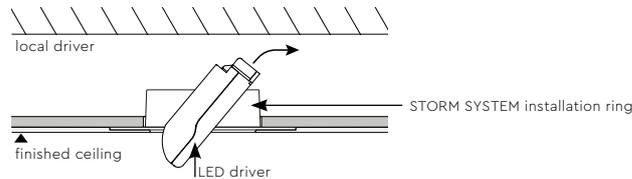

ADDITIONAL REQUIREMENTS: (not included)

Installation rings - choose one of the installation rings below

- Storm Medium Plaster Ring - 1A01.0001.01
- Storm Medium Acoustic Adaptor - 1A01.0091.00
- Storm Medium Trim Ring - 1A01.0003.xx
- Storm Medium Back-Mounted Ring - 1A01.0048.xx
- Storm Medium Back 007 Ring - 1A01.0047.04
- Storm Medium Concrete Halo-X BMR - 1A01.0055.xx
- Storm Medium Concrete Cabinet A|B|C - 1A01.008X.xx
- Storm Medium Extension S150 - 1A01.0017.xx
- Storm Medium Extension S350 - 1A01.0035.xx

*Installation depth doesn't include driver. Please check driver specification.
 When using Storm Medium Cabinet, review datasheet for installation depths

NOTE:

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.


The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced.


Be cautious while putting on/off the power supply, as excess current, excess voltage or reverse voltage may get injected to the device in some cases.

Storm Medium Moon is for INDOOR USE ONLY.

INSTALLATION

Luminaire not suitable for covering with thermal insulation material.





COMPONENTS

- Storm Medium Moon
 - Suction cup for disassembly (accessory)
 - Spring

PLEASE NOTE:

If the spring on the fixture is damaged, do not proceed installation – contact your dealer

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

BRASS FINISHES

For detailed maintenance please review ➤

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk



ASSEMBLY INSTRUCTION

STEP 1

Connect the supply cables, then mount the fixture into the installation ring. Do this by slightly rotating the fixture into the place

ATTENTION! Make sure you are using the correct power supply according to the fixture.


NOTE: When rotating the fixture choose the direction with the least resistance.

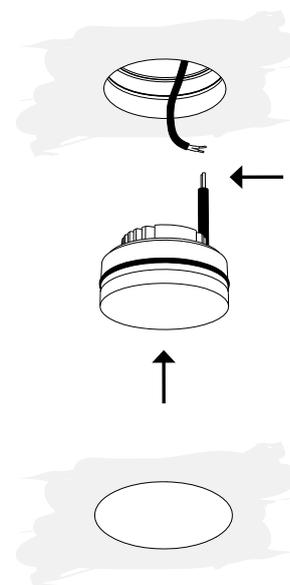

DISASSEMBLY INSTRUCTION

STEP 1


Place the suction cup over the fixture.



STEP 2


Turn the handle to ensure suction, then pull down gently, whilst slightly rotating.

NOTE: When rotating the fixture choose the direction with the least resistance.



STEP 3

Disconnect the cables

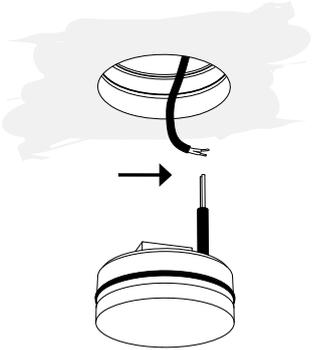

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

BRASS FINISHES

For detailed maintenance please review [►](#)

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk