



STORM SMALL SUN

datasheet



Project: Private Residence | Lighting design: Alexander Brenner Architects

The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The soft, pleasant light is a perfect solution for a night light.

GENERAL DATA

Collection

STORM SYSTEM®

Product

Storm Small Sun

Article no.

- 1A00.0113.3265
- 1A00.0113.3266

SPECIFICATIONS

Weight

320 g

Material

Aluminium and natural stone

Fixture finish

Alabaster

Please note: Natural stone - variations will occur

IP protection grade

IP20

Insulation class


Class III 

Labelling



Safety distance

 0,3m

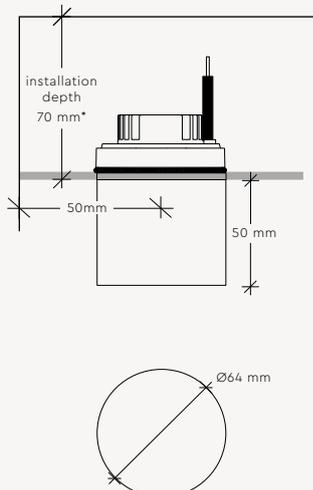

ELECTRICAL SPECIFICATION

1A00.0113.3265 - DIM

Light Source	LED constant current (included)
Supply	5W 33V 130mA
CCT	2500K (nature stone - variations can occur!)
IES/LDT	review LUX FILES ➤



Additional requirements: (not included)

Driver	1AD.420PC20.DS Phasecut 1AD.300DA12.DS Dali 1AD.420DA20.DS Dali
--------	-----------------------------------------------------------------------------

Installation depth

70mm* (remote driver)

1A00.0113.3266 - DIM TO WARM

Light Source	LED constant current (included)
Supply	5W 33V 130mA
CCT	2500 - 2000K (nature stone - variations can occur!)
IES/LDT	review LUX FILES ➤



Additional requirements: (not included)

Driver	1AD.420PC20.DS Phasecut 1AD.300DA12.DS Dali 1AD.420DA20.DS Dali
--------	-----------------------------------------------------------------------------

Installation depth


70mm* (remote driver)

LOCAL DRIVER - Installation depth

If installation requires a locally positioned LED driver, please review chart below.

ATTENTION! installation must be carried out by an authorized installer, in accordance with national legislation

SYSTEM →	SMALL		
	PLASTER RING 1A00.0002.01	BACK-MOUNTED RING 1A00.0049.xx	BACK 007 RING 1A00.0047.x4
1AD.xxxPCxx	100 mm	110 mm	110 mm
1AD.420PC20.DS	130 mm	150 mm	150 mm
1AD.300DA12.DS	110 mm	130 mm	130 mm
1AD.1050DA15.420	110 mm	130 mm	130 mm
1AD.420DA20.DS	110 mm	130 mm	130 mm
1AD.500DA20.DS	130 mm	150 mm	150 mm
1AD.CV24xx24	130 mm	150 mm	150 mm
1AD.CV24DA120	240 mm	280 mm	280 mm

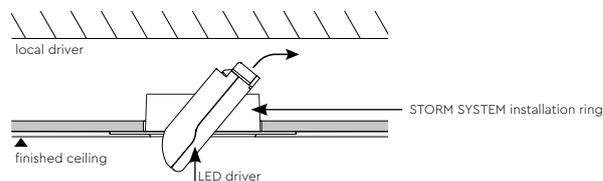

ADDITIONAL REQUIREMENTS: (not included)

Installation rings - choose one of the installation rings below

- Storm Small Plaster Ring - 1A00.0002.01
- Storm Small Back-Mounted Ring - 1A00.0049.xx
- Storm Small Back 007 Ring - 1A00.0047.04
- Storm Small Extension S120 - 1A00.0017.xx
- Storm Small Extension S300 - 1A00.0035.xx

*Installation depth doesn't include driver. Please check driver specification. Installation depth can be reduced to 55mm if heat shrink crimping cable connection is used.

ONE A reserves the rights to change and/or update product information and accepts no liability for any printing errors.
last updated 21 - 05 - 2025

NOTE:

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of the light fixture.

The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced.


Be cautious while putting on/off the power supply, as excess current, excess voltage or reverse voltage may get injected to the device in some cases.


Storm Small Sun is for INDOOR USE ONLY.

ATTENTION - external driver location is recommended.

INSTALLATION

Luminaire not suitable for covering with thermal insulation material.





COMPONENTS

- Storm Small Sun
- Spring

PLEASE NOTE:

If the spring on the fixture is damaged, do not proceed installation – contact your dealer

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

BRASS FINISHES

For detailed maintenance please review >

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk


ASSEMBLY INSTRUCTION

STEP 1

Connect the cables, then mount the fixture into the installation ring. Do this by slightly rotating the fixture into the place

ATTENTION! Make sure you are using the correct power supply according to the fixture.

NOTE: When rotating the fixture choose the direction with the least resistance.

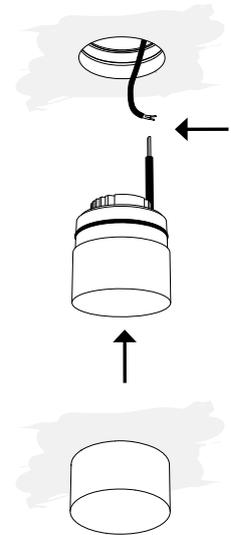


DISASSEMBLY INSTRUCTION

STEP 1


Take hold of the fixture and pull down gently, whilst slightly rotating.

NOTE: When rotating the fixture choose the direction with the least resistance.



STEP 2

Disconnect the cables

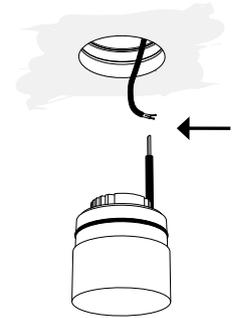

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

BRASS FINISHES

For detailed maintenance please review [►](#)

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk