



## AW400L datasheet



Project: Private Residence | Lighting design: ONE A

The AW400 lamp is a wall mounted lamp. LEDs inside the alabaster tube, ensures that a homogeneous and continuous light is emitted throughout the stone.

The slender plinth, made from either aluminium or brass, is rounded towards the alabaster thereby embracing the material with a seemingly minimal touch.

The assembly method lends itself to creativity, as the lamp can be positioned in different directions.

## GENERAL DATA

### Collection

ONE A

### Product

AW400L

### Article no.

- 1A11.3848.xx05
- 1A11.3848.xx15

## SPECIFICATIONS

### Weight

1 kg / 1,45 kg


### Material

Aluminium / Brass and Alabaster

### IP protection grade

IP20

### Labelling

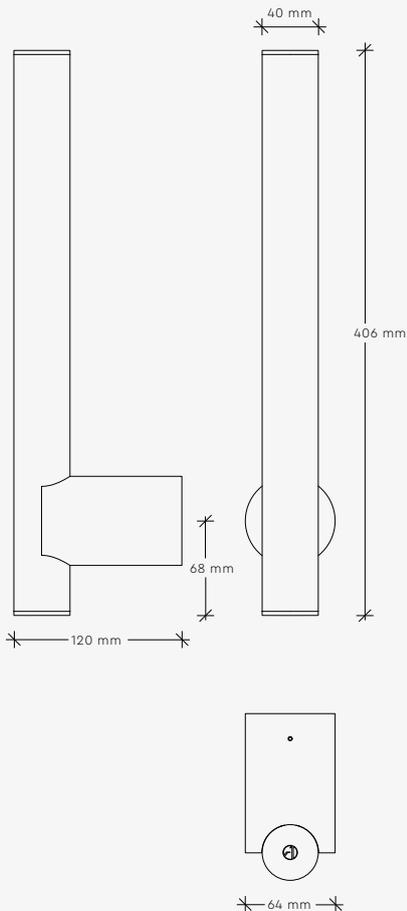

## CONSTANT VOLTAGE - ELECTRICAL SPECIFICATION

### 1A11.3848.xx05 - 24Vdc

Supply	24Vdc   6W
CCT	2700K (nature stone - variations will occur!)
Lumen	291 lm
Efficiency	38 lm/W
Insulation class	Class III
Dimmable	yes - depending on remote driver

### Additional requirements: (not included)

Driver	1AD.CV24PC24   Phasecut 1AD.CV24DA24   Dali
--------	--

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver



## MAINS VOLTAGE - ELECTRICAL SPECIFICATION

### 1A11.3848.xx15 - 230V

Supply	AC200-240V 50/60Hz   6W
CCT	2700K (nature stone - variations will occur!)
Lumen	291 lm
Efficiency	38 lm/W
Insulation class	Class II
Driver	Phasecut driver included
Dimmable	Dimming with leading edge or trailing edge dimmer



### NOTE:

Suitable wallbox for plastered surfaces: Kaiserbox EAN: 7611614061856


The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced.

### XX - COLOUR CODES

- Full colour (Alu or Brass)



(\*) Brass is a natural product and colour will change over time

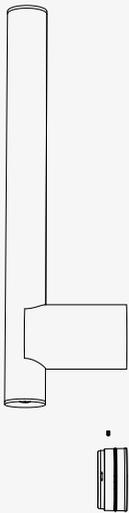

**COMPONENTS**

- AW400L
- Storm S Base
- Quill screw

**IMPORTANT INFORMATION**

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

**CLEANING AND MAINTENANCE:**

Use a soft moist cloth for cleaning. No further maintenance is required.

**WARRANTY:**

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal


For more information, please contact [info@onea.dk](mailto:info@onea.dk)

**ASSEMBLY INSTRUCTION**

Page 1 of 2


**STEP 1**

Mount the fixture onto the wall, by placing the Storm S Base over the screws, then tighten.

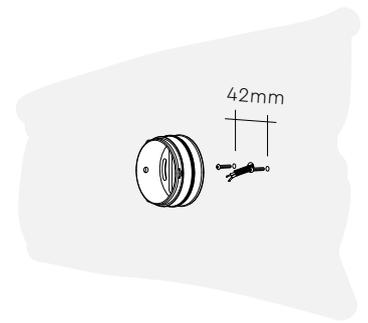


**NOTE:**

There are two sets of mounting options; horizontal or vertical.

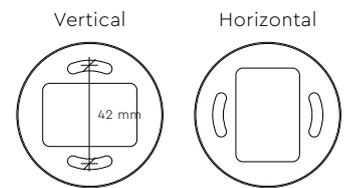


**NOTE:**

The hole on the top of the fixture and the two holes on the Storm S Base determine the direction of the fixture



**NOTE:**



The fixture must have a minimum distance from a wall

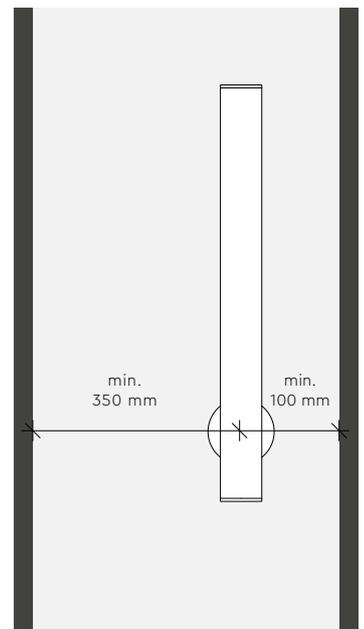

## ASSEMBLY INSTRUCTION

Page 2 of 2

Fixture can be turned upside down


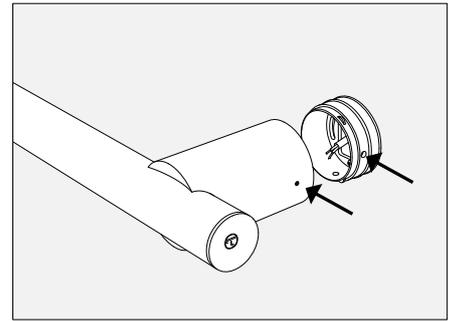
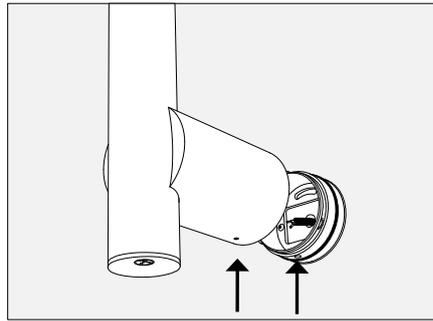


### STEP 2

**WARNING:** Make sure the power is OFF before installing the fixtures  
Connect the supply cable to the fixture terminal and then mount the fixture.

**ATTENTION:** Always make sure to check the fixtures markings regarding voltage supply.  
**DO NOT** connect mains power directly to a low voltage fixture.

**NOTE:** Be careful not to damage the "ears" on the base when mounting the fixture.

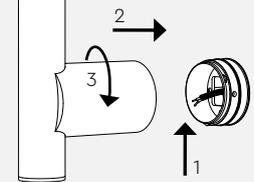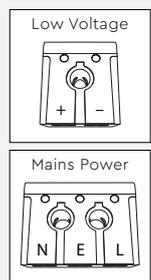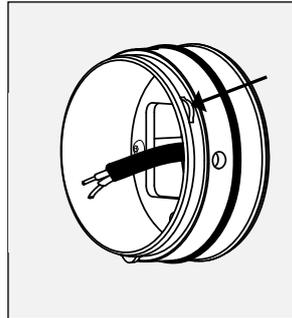

### IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

### CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

### WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.




The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal.

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

### STEP 3


Make sure that the holes align. Then lock the position by tightening the quill screw with the allen key

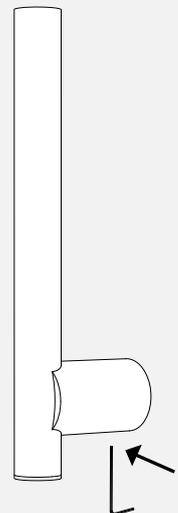

## DISASSEMBLY INSTRUCTION


### STEP 1

Release the quill screw and gently turn and pull the fixture from the Storm S Base.

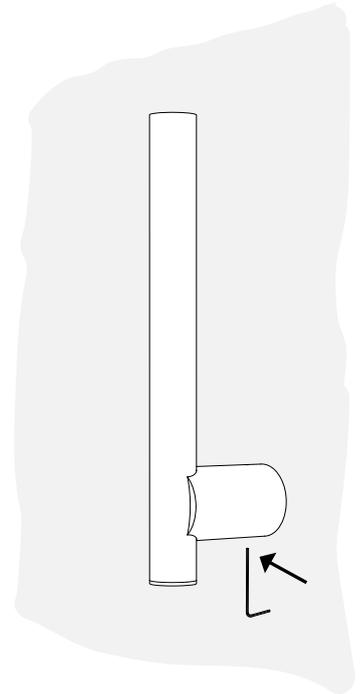


### STEP 2

Disconnect the cables.

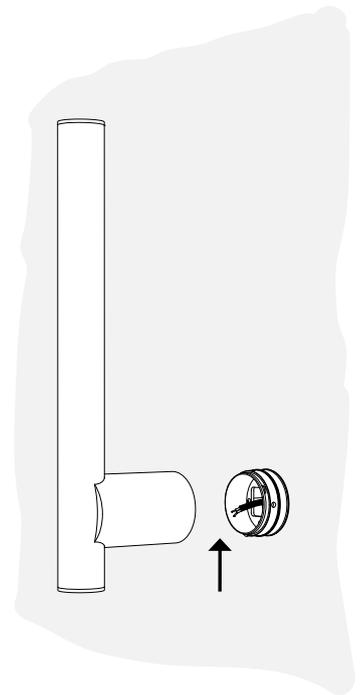

### STEP 3

Loosen the screws, then slightly rotate and gently pull

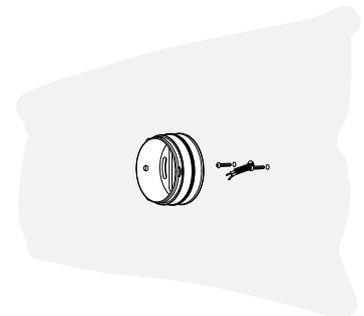

### IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

### CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

### WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)