




## ↓ PRODUCT DISCIPTION

Its fully adjustable rounded shape allows a 360° horizontal rotation and a 2\*30° vertical rotation. It is available in multiple versions: recessed, rail-mounted, suspended, ceiling or wall-mounted. Available in monochrome or bicolor version. Available in monochrome or bicolor, with surface treatments or with more sober versions in black or white epoxy paint, the BBL15 collection creates atmospheres in every room where it is installed.

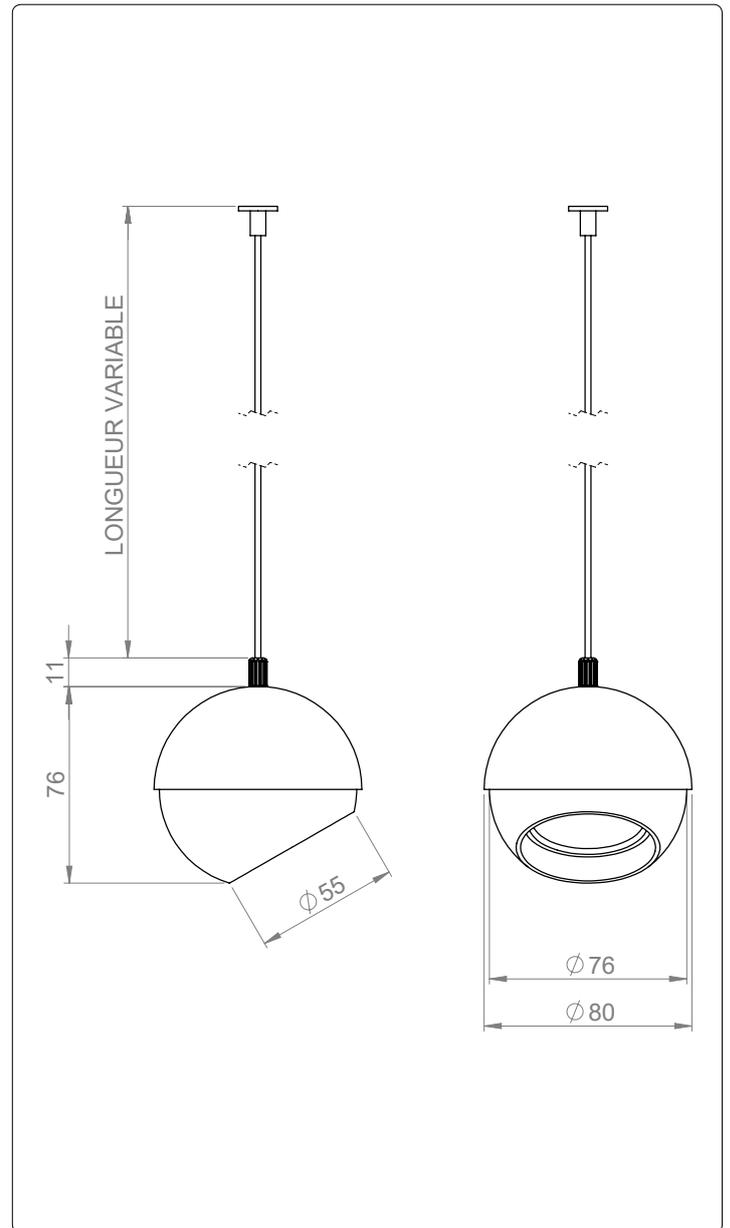

## ↓ OUTPUT

12W

## ↓ LUMENS

1200lm

## ↓ CRI

IRC90

## ↓ POWER SUPPLY

1A

## ↓ DIMMING



DMX

CASAMBI

## ↓ DEGREES (INTERCHANGEABLE LENSES)

10°

15°

25°

35°

ELL

## ↓ IP RATING

IP 40

## ↓ USE



## ↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

## ↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2



## ↓ COLOURS

BK

WH

CUSTOM

## ↓ SOURCES

- Luminous flux according to Bining : LED : 1200 lumens ;
- Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

## ↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees : 10°, 15°, 25°, 35° et ELL.

## ↓ ÉLECTRICAL CHARACTERISTICS

- Constant supply 1A,
- Reversible polarity and hot plug;
- Power consumption to 12W max
- Electrical classification: Class III SELV device.

## ↓ MECHANICAL CHARACTERISTICS

- Operating temperature: -5° +40°;
- ROHS components;;
- Interior use only.

## ↓ SPECIFICITIES

- Electrolytic treatment available;
- 3 years guarantee.

## ↓ CLASSIFICATION

Référence produit	BBL15		
Spécification produit	A		
Colour	Black	BK	
	White	WH	
	CUSTOM	CU	
Colourtemperature	2700K	27	
	3000K	30	
	3500K	35	
	4000K	40	
Degrees	10°	10	
	15°	15	
	25°	25	
	35°	35	
	ELL	ELL	
REFERENCE	BBL15-	A-	BK- 27- 10

# BBL15-AA

## ACCESSORIES

---

REF : BBL15-AA

ARCHITECTURALE

EN



ACBBL15OPNIDABBKD51C  
Honeycomb BBL15



ACBBL15OPSNOOTBKL10C  
Snoot BBL15