



AW800 datasheet



Project: Treutlien Flagship Store | Molteni&C

The AW800 lamp is a wall mounted lamp. LEDs inside the alabaster tube, ensures that a homogeneous and continuous light is emitted throughout the stone.

The slender plinth, made from either aluminium or brass, is rounded towards the alabaster thereby embracing the material with a seemingly minimal touch.

The assembly method lends itself to creativity, as the lamp can be positioned in different directions. .

GENERAL DATA

Collection

ONE A

Product

AW800

Article no.

- 1A11.3849.xx05
- 1A11.3849.xx15

SPECIFICATIONS

Weight

2 kg / 2,9 kg

Material


Aluminium / Brass and Alabaster

IP protection grade

IP20

Labelling

CE

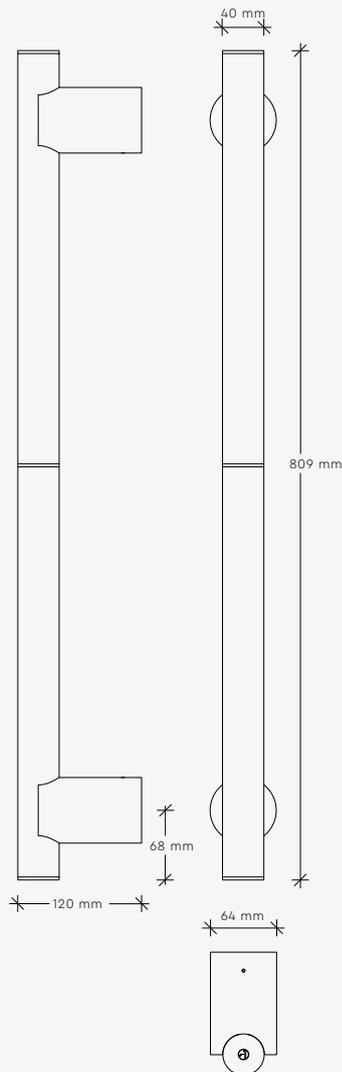

CONSTANT VOLTAGE – ELECTRICAL SPECIFICATION

1A11.3849.xx05 – 24Vdc

Supply	24Vdc 12W
CCT	2700K (nature stone – variations will occur!)
Lumen	393 lm
Efficiency	23 lm/W
Insulation class	Class III 
Dimmable	yes – depending on remote driver

Additional requirements: (not included)

Driver	1AD.CV24PC24 Phasecut 1AD.CV24DA24 Dali
--------	--

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver



MAINS VOLTAGE – ELECTRICAL SPECIFICATION

1A11.3849.xx15 – 230V

Supply	AC200–240V 50/60Hz 12W
CCT	2700K (nature stone – variations will occur!)
Lumen	393 lm
Efficiency	23 lm/W
Insulation class	Class II 
Driver	Phasecut driver included
Dimmable	Dimming with leading edge or trailing edge dimmer



NOTE:

Suitable wallbox for plastered surfaces: Kaiserbox EAN: 7611614061856


The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced. When the light source reaches its end of life the whole light fixture must be replaced.

XX – COLOUR CODES

- Full colour (Alu or Brass)



(*) Brass is a natural product and colour will change over time

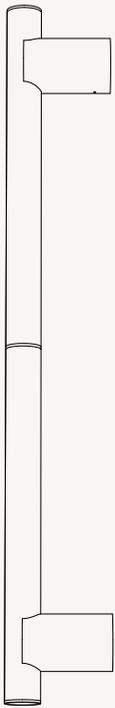

COMPONENTS

- AW800
- 2 x Storm S Base
- 2 x Quill screw

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk


ASSEMBLY INSTRUCTION

Page 1 of 2

STEP 1




Mount the two S Base on the wall.

Make sure the secure screw is pointing away from the fixture center.

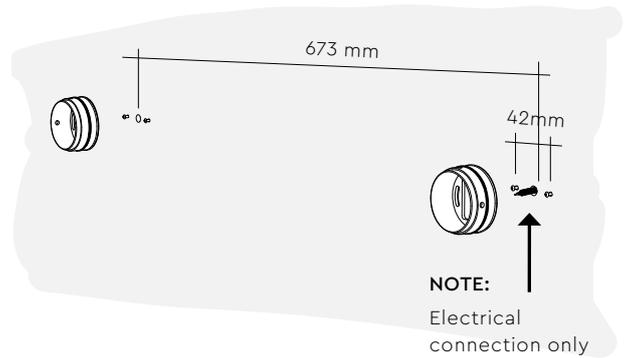

NOTE:

There are two sets of mounting options; horizontal or vertical.

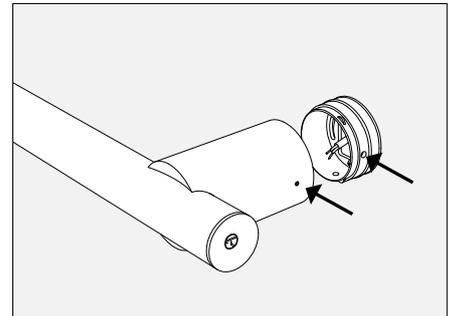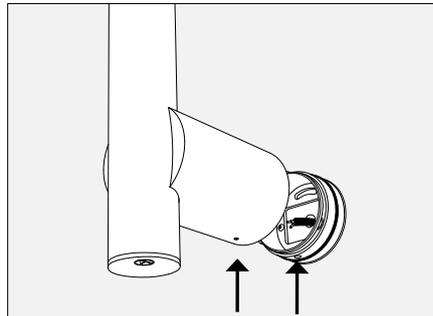
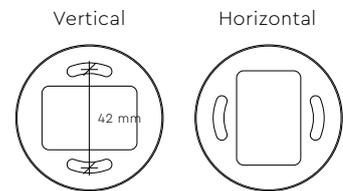


STEP 2

WARNING: Make sure the power is OFF before installing the fixtures

Connect the supply cable to the fixture terminal and then mount the fixture.

ATTENTION: Always make sure to check the fixtures markings regarding voltage supply. **DO NOT** connect mains power directly to a low voltage fixture.

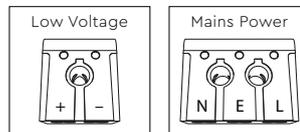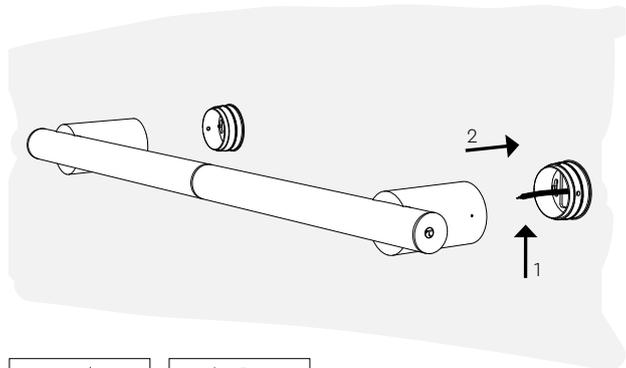


ASSEMBLY INSTRUCTION

Page 2 of 2

STEP 3

Make sure that the holes align. Then lock the position by tightening the quill screw with the allen key

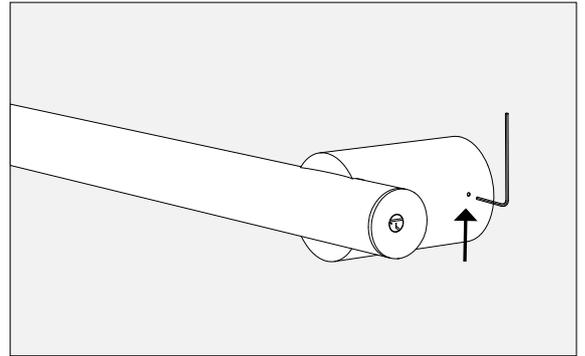

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.




The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

DISASSEMBLY INSTRUCTION


STEP 1

Release the quill screw and gently turn and pull the fixture from the Storm S Base.

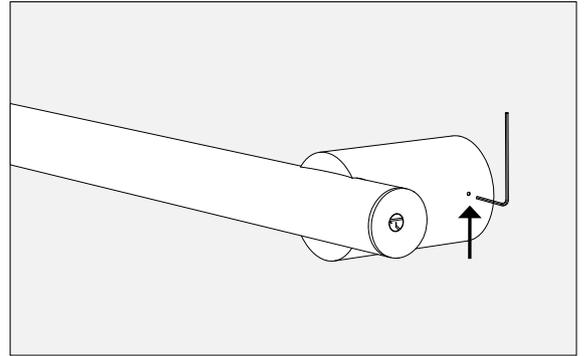


STEP 2

Disconnect the cables.

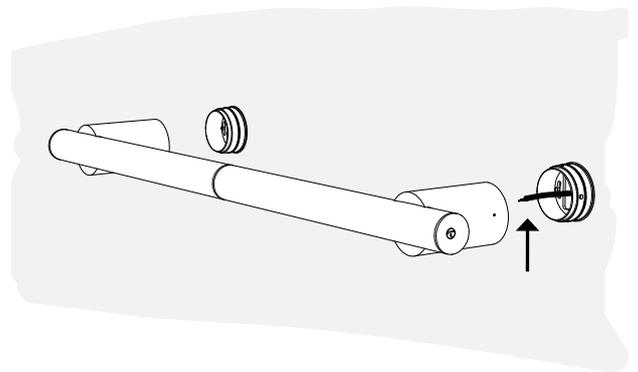

STEP 3

Loosen the screws, then slightly rotate and gently pull

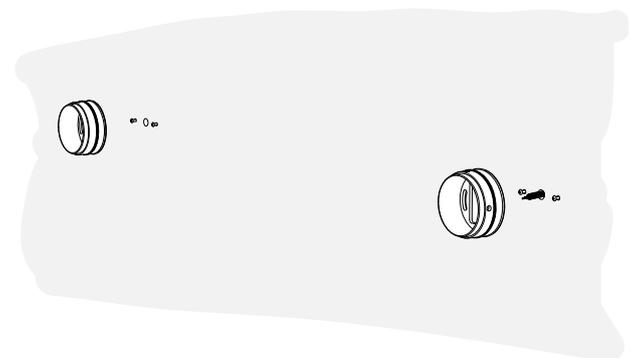

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk