

MA3 XL

surface



TUBO Collection XL


One spot, Infinity Configurations

La Collezione Tubo XL è una linea di prodotti nata per creare infiniti dettagli di design e infiniti scenari luminosi, grazie al semplice processo di variazione del fascio luminoso. Disponibile in diverse dimensioni, tipologie di installazione e arricchita da una vasta gamma di finiture, la Collezione Tubo è progettata per adattarsi a ogni spazio e stile, offrendo infinite possibilità di personalizzazione. Questa collezione rappresenta un'armonia perfetta tra design e funzionalità, ideale per illuminare i più prestigiosi spazi di design.

info@turnlights.it / turnlights.com


The Tubo XL Collection is a range of products designed to offer endless creative possibilities and a variety of lighting options, thanks to the straightforward process of adjusting the light beam. Available in various sizes, installation types and a range of finishes, the Tubo Collection is crafted to suit every space and style, providing endless customisation options. This collection strikes the perfect balance between design and functionality, making it ideal for illuminating the most prestigious design spaces.

MADE IN ITALY

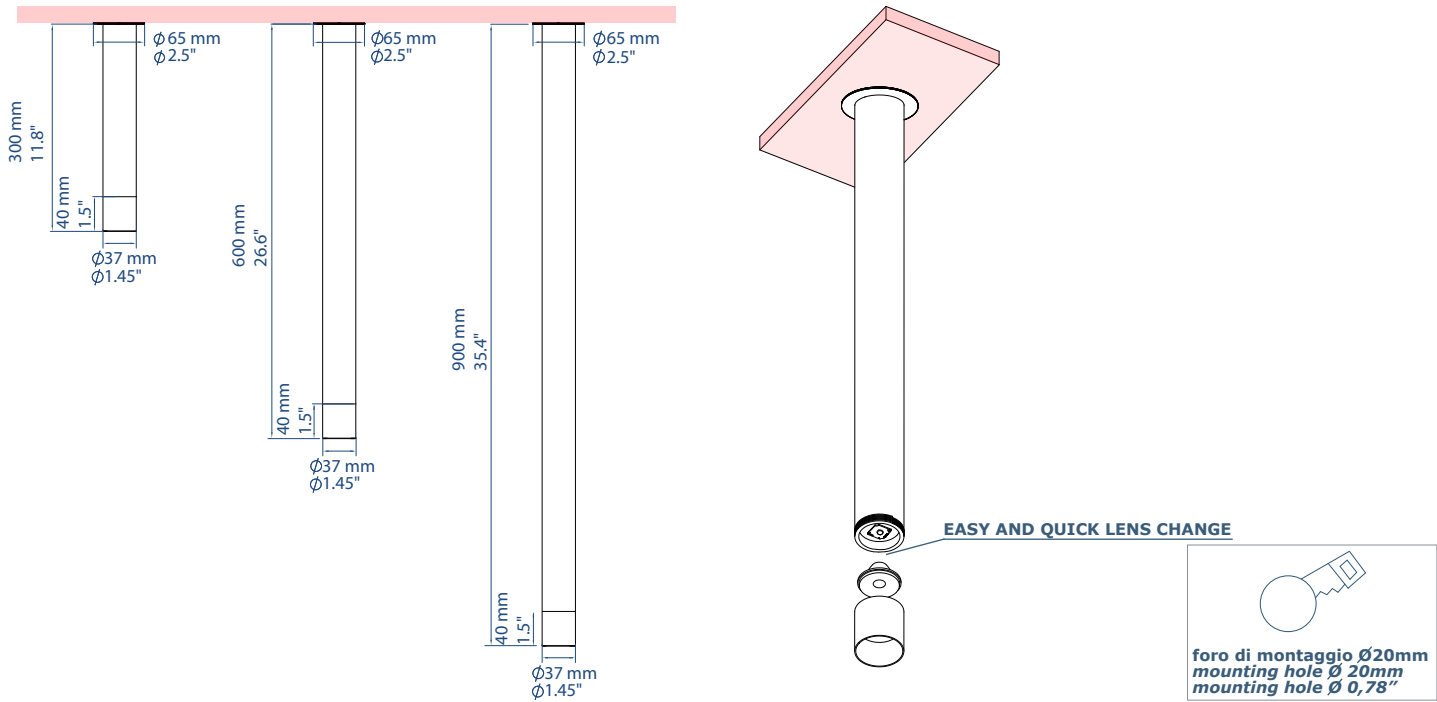

CARATTERISTICHE / FEATURES

tipo di installazione type of intallation	superficie surface
materiali materials	corpo in ottone, lente in PMMA efficienza ≈90% brass body, PMMA lens efficiency ≈90%
dimensioni complessive overall dimensions	37x300/600/900 mm / 2.5"x11.8/26.6/35.4"
peso weight	---
fascio beam angle	16° / 24°
finiture finishes	vasta gamma di finiture disponibili a catalogo wide range of finishes available

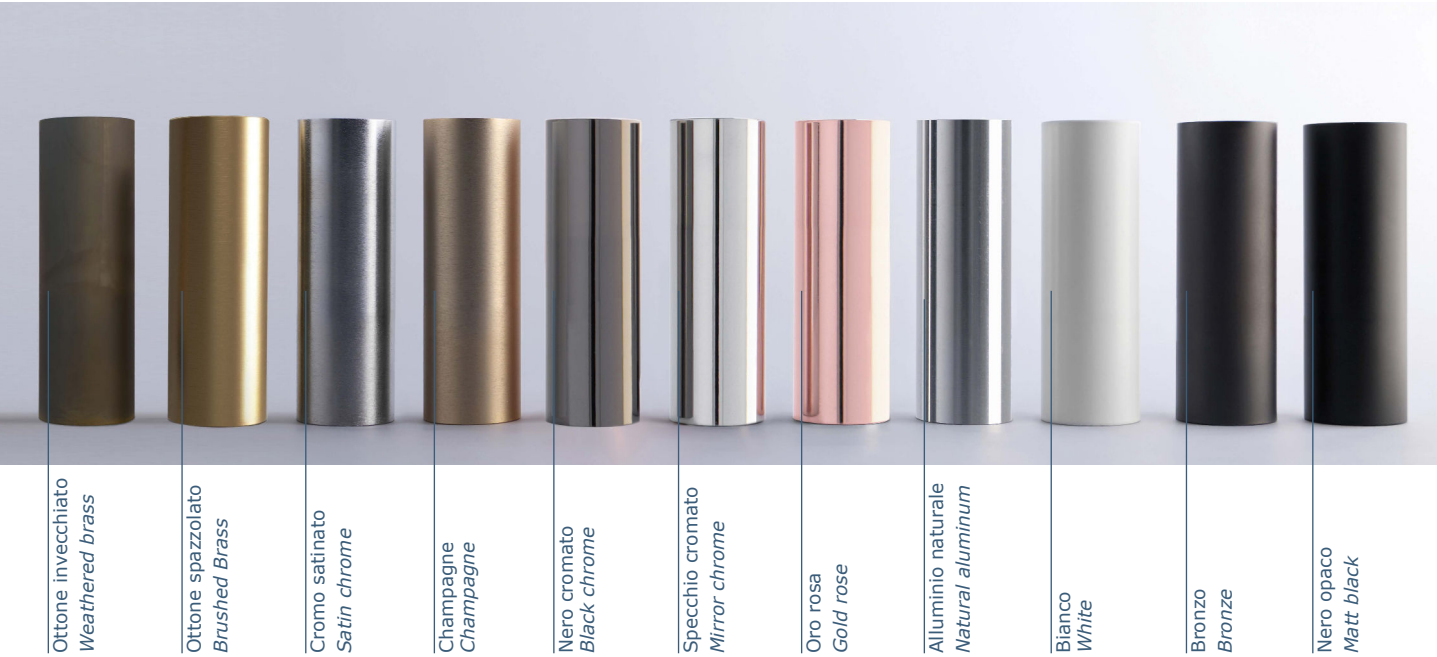

SPECIFICHE ELETTRICHE / ELECTRICAL DATA

Volt voltage	max 250mA / 36Volt Option: 24volt dc/dc converter 36Volt-250mA
dimmerazione dimming	sì, a richiesta yes, on request



SORGENTE LUMINOSA / LIGHT SOURCE

tipo di fonte type of source	COB LED Hi CRI> 98
potenza power	9W max
flusso luminoso luminous flux	625lm
intensità peak intensity	---
temperatura di colore color temperature	2700K / 3000K / 3500K / 4000K / 5000K CRI>98 su richiesta 2200K / 5000K CRI>90 on request 2200K / 5000K CRI>90
fidelity index (Rf)	>98
gamut index (Rg)	>101,7
selezione cromatica chromatic selection	MAC-ADAM 1Step
lifetime	>50 000h Flusso>70% >50 000h Flux>70%

MISURAZIONI FOTOMETRICHE / PHOTOMETRIC MEASUREMENTS

fascio stretto / narrow beam 16°

fascio medio / medium beam 24°

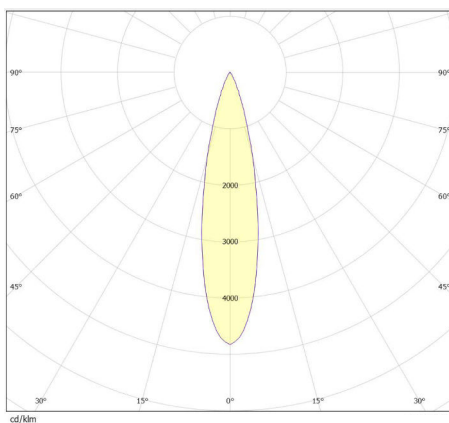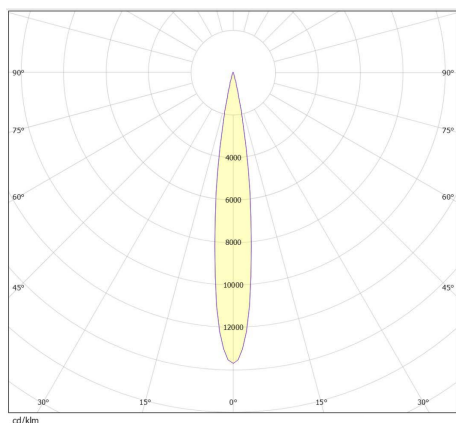

CERTIFICAZIONI / CERTIFICATIONS

IP 20 CLASSE II CEI 34-21

MADE
IN
ITALY

TRANSPORT CONDITIONS: Ambient temperature 0°C - +35°C; Relative Humidity 5% - 70% Rh.
STORAGE CONDITIONS: 0°C - 40°C; Humidity relative 5%-70% Rh, No dew, No Water spray. Recommended storage Temp is: 25°C with Humidity <65% Rh.
OPERATIONAL ENVIRONMENTAL CONDITIONS: Ambient temp : +5°C - 35°C Relative Humidity : 20% - 75% Rh

il materiale non può essere modificato, copiato, riprodotto o trasferito, né utilizzato in maniera impropria /
the material can not be modified, copied, reproduced or transferred neither used improperly

info@turnlights.it / turnlights.com



REVISIONE / REVISION 11/2024

soggetto a modifiche senza preavviso
subject to change without prior notice

ACCESSORI / ACCESSORIES

Micro connettore M/F antistrappo - 28xØ9mm - 24Volt
Micro plug connector M/F tearproof - 28xØ9mm - 24Volt

Collegamento a raccordo fisso
Hardwire connection




Drivers
(standard driver 24 Volt / DALI / 1-10V / DMX/RMX)


lep / lep DALI
(USA only)

INDICAZIONI INSTALLAZIONE / INSTALLATION DIRECTIONS


1_FISSA LA SUPERFICE MAGNETICA AL SOFFITTO 1_FIX THE MAGNETIC SURFACE TO THE CEILING

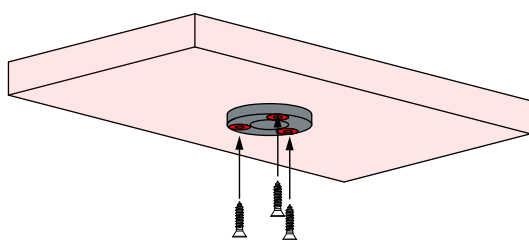

2_CONNETTI I PLUG / MORSETTI 2_CONNECT THE PLUG / ELECTRICAL CLAMP

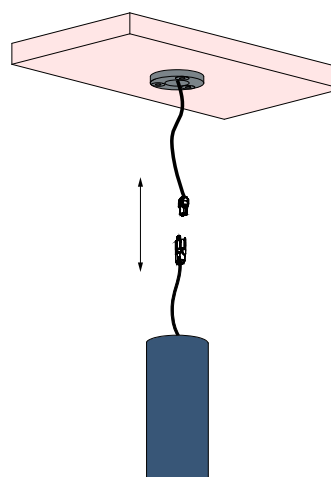

3_POSIZIONA LO CHANDELIER SULLA SUPERFICIE MAGNETICA 3_PLACE THE CHANDELIER ON THE MAGNETIC SURFACE

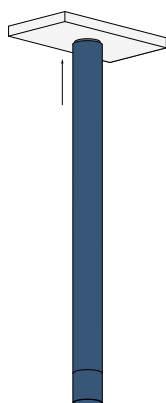

4_CAMBIA SCENARIO LUMINOSO GRAZIE AL CAMBIO LENTE FACILE E RAPIDO 4_CHANGE LIGHT SCENARIO THANKS TO THE EASY AND QUICK LENS CHANGE

