

## ↓ PRODUCT DESCRIPTION

Particularly appreciated in commercial architecture and scenography for its precision lighting, this mini spotlight, featuring the distinctive articulation of the D range, stands out for its high luminous efficiency and compact size. Its discreet and elegant design offers a wide selection of optical characteristics, color temperatures, and finishes, providing numerous customization options.

## ↓ OUTPUT (PEG)

2.1W     2.6W

## ↓ OUTPUT (TRACK, RCA)

## ↓ CRI

IRC90

## ↓ USE

## ↓ IP

IP 40

## ↓ POWER SUPPLY (PEG)

700mA

## ↓ LUMENS

200lm

## ↓ DEGREES

10°  29°  48°  ELL

## ↓ POWER SUPPLY (TRACK, RCA)

24V

## ↓ DIMMING

1-10V  BALL  CASAMBI  DMX

## ↓ COLOUR TEMPERATURE

2400K  2700K  3000K  3500K  4000K  5000K

## ↓ STANDARDS COMPLIANCE

EN 62471  EN 60598-1  EN 60598-2  CE  III  ETL

## ↓ COLOURS

BK  WH  CUSTOM

## ↓ SOURCES

- Luminous flux according to Bining: 200lumens
- Colour temperature : de 2400K to 5000K
- Service Range: 70 % of nominal flux after 50 000 hours
- Colour Rendering Index: CRI 90

## ↓ OPTICAL

- PMMA acrylic lens, efficiency ~90%
- Degrees : 10°, 29°, 48° and Elliptic

## ↓ ELECTRICAL (on peg)

- Power supply 700mA
- Reversible polarity and hot plug
- Power consumption to 2.1W max, excluding supply
- Electrical Classification : Class III SELV device

## ↓ ELECTRICAL (on tracks or RCA)

- Power supply 24V
- Electric transmission by magnetic contact
- Reversible polarity and hot plug
- Power consumption to 2.6W max, excluding supply
- Electrical Classification : Class III SELV device

## ↓ MECHANICAL

- Electronic circuit encased in a fire-proof polycarbonate housin
- Fixing by magnetic contact (on track)
- Operating temperature : -5° +40°
- Articulating base
- ROHS components
- Interior use only

## ↓ SPECIFICITIES

- 3 years guarantee

## ↓ SPOT NOMENCLATURE

Product Ref.	SD002		
Product specification	Simple peg	A	
	RCA	ARCA	
	Piccolo track	P	
	Slim track magnet	SMA	
Colour	Black	BK	
	White	WH	
	Custom	CU	
Temperature	2400K		24
	2700K		27
	3000K		30
	3500K		35
	4000K		40
	5000K		50
Degrees	16°		10
	24°		29
	40°		48
	Elliptic		ELL
REFERENCE	SD002	A	BK 24 10

## ↓ MOUNTING NOMENCLATURE

Mounting spec.	Mounting recessed Ø43	ACSFIPATER43	ENCC
	Mounting recessed Ø60	ACSFIPATER60	ENCAC
	Mounting ceiling Ø50	ACSFIPATER50	APPC
	Mounting ceiling X1spot	ACSFIPA1704030	AP1C
	Mounting ceiling X2spot	ACSFIPA1704030	AP2C
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE		ACSFIPATER43	BK ENCC

## ↓ RCA TRIM NOMENCLATURE

Product reference		ACSDRCA	APPC
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE		ACSDRCA	BK APPC

## ↓ NOMENCLATURES PATERE RCA TRIMLESS

Référence produit	ACSDRCAENCC
-------------------	-------------


# Spot mini D

## MOUNTING CONFIG.

REF : SD002



### ↓ MOUNTING CONFIGURATION




**SD002A**  
Simple peg Ø24.5mm



**SD002SMA**  
Slim track Width 13mm






**SD002P**  
Piccolo track Width 27mm



**SD002ARCA**  
RCA

### ↓ Beam angle

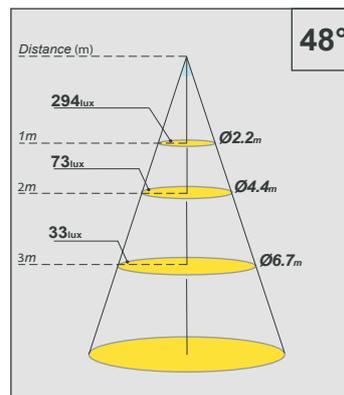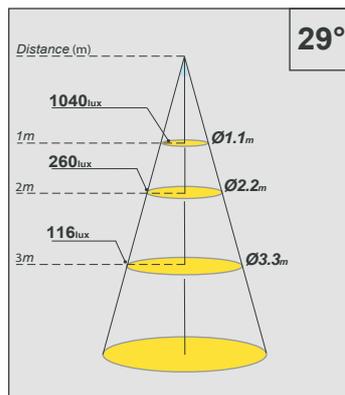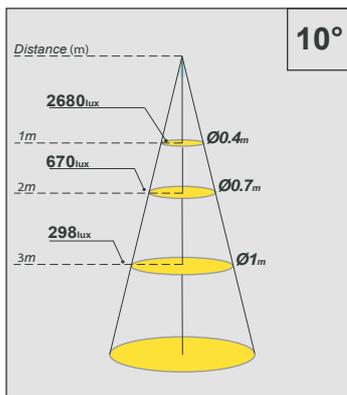

# Spot mini D

## ORDER REFERENCE

REF : SD002


SPOT EN

### ORDER REFERENCE (MOUNTING NOMENCLATURE)




**SD002-A-BK-24**  
Mini D spot - Simple peg -  
Black(BK) - 2400K(24).

+




**ACSFIPATER43XXENCC**  
Fixing mounting recessed  
Ø43mm H34mm

ou



**ACSFIPATER60XXENCAC**  
Fixing mounting recessed  
Ø60mm H34mm

ou



**ACSFIPATER50XXAPPC**  
Fixing mounting ceiling  
Ø50mm H30mm

ou



**ACSFIPA1704030XXAP1C**  
Fixing mounting ceiling  
(driver in)  
x1 spot : 170x40x30mm

ou



**ACSFIPA1704030WHAP2C**  
Fixing mounting ceiling  
(driver in)  
x2 spots : 170x40x30mm

### ORDER REFERENCE (RCA TRIM NOMENCLATURE)



**SD002-ARCA-BK-24**  
Mini D spot - RCA -  
Black(BK) - 2400K(24).

+



**ACSDRCABKAPPC**  
Mounting RCA trim - Black(BK)  
(Ø50mm)

=



### ORDER REFERENCE (RCA TRIMLESS NOMENCLATURE)



**SD002-ARCA-BK-24**  
Mini D spot - RCA -  
Black(BK) - 2400K(24).

+



**ACSDRCAENCC**  
Mounting RCA trimless

=




# Spot mini D

## ACCESSORIES

REF : SD002

SPOT EN

### ↓ RCA ACCESSORIES




**ACSDRCABOUCHONXXC**  
Finishing cap for RCA trim &  
trimless mounting

### ↓ POWER SUPPLY CONNECTORS




**ACSD002COCIRCPXX500**  
Piccolo circuit with sheath  
heat-shrinkable

### ↓ OPTICAL ACCESSORIES



**ACCS2NDIDABBK023C**  
Honeycomb Ø23mm



**ACSD002SNOOTBKL10C**  
Mini D Snoot +10mm