


Spot D10

REF : SD010

SPOTS EN

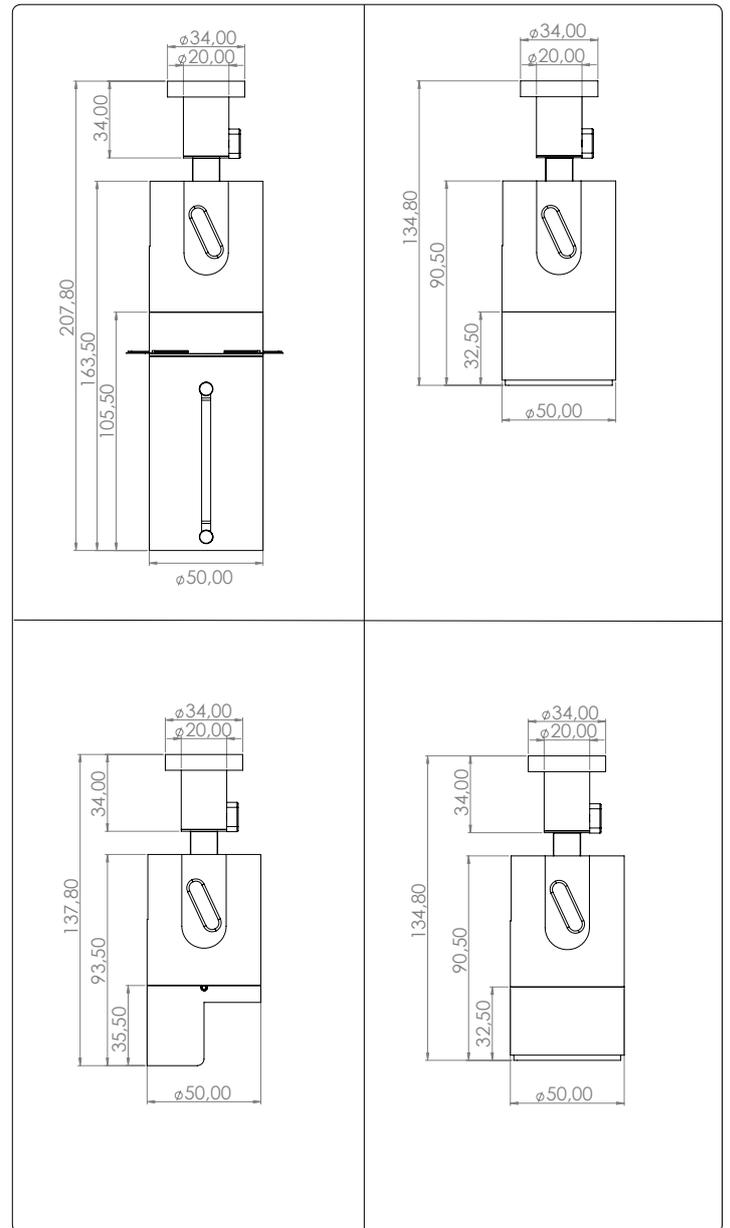

↓ PRODUCT DESCRIPTION

The D10 spotlight is designed for optimal modularity with its four options:

- Framer
- Interchangeable lenses
- Wallwasher
- Focus

Every detail is carefully crafted to meet the most technical configurations with efficiency and precision.

↓ OUTPUT (PEG)

9W

↓ OUTPUT (TRACK, RCA)

11.5W

↓ LUMENS

500lm

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2

CE

III

ETL

↓ POWER SUPPLY (PEG)

500mA

↓ POWER SUPPLY (TRACK, RCA)

24V

↓ DEGREES (FRAMER / WALLWASHER / ZOOM)

15°→30°

WW

8°→35°

↓ ADJUSTABLE DEGREES

10°

15°

25°

35°

ELL

↓ COLOUR TEMPERATURE

2200K

2400K

2700K

3000K

3500K

4000K

5000K

↓ COLOURS

BK

WH

CUSTOM

↓ DIMMING

1-10V

TRAIL

CASAMBI

DMX

↓ USE



↓ CRI

IRC97

↓ IP

IP 40

↓ SOURCES

- Luminous flux according to Bining: 1000lm
- Colour temperature : de 2200K to 5000K
- Service Range: 70 % of nominal flux after 50 000 hours
- Colour Rendering Index: CRI 97

↓ OPTICAL

- PMMA acrylic lens efficiency ~90% (ww. & interchangeable lenses)
- Glass lens (framer & zoom)
- Interchangeable lenses : 10°, 15°, 25°, 35° et ELL
- Focal length: 15° et 30° (framer)
- Focal length : 8° et 35° (zoom)

↓ ÉLECTRIQUES

- Power supply (on peg)
- Power supply 24V (on tracks or RCA)
- Power supply 220V (900mA) (on 220 track)
- Power consumption to 9W max, excluding supply (on peg)
- Power consumption to 11.5W max, excluding supply (on tracks or RCA)

↓ MECHANICAL

- Filter support (framer & zoom)
- GOBO (only on framer)
- Articulating base
- Operating temperature : -5° +40°
- ROHS components
- Interior use only

↓ SPECIFICITIES

- 3 years guarantee

↓ SPOT NOMENCLATURE

Product Ref.	SD010		
Product specification	Simple peg	A	
	RCA	ARCA	
	Piccolo track	P	
	Slim track magnet	SMA	
	220 0-10V track	RV	
	220 DALI track	RD	
Colour	Black	BK	
	White	WH	
	Custom	CU	
Temperature	2200K		22
	2700K		27
	3000K		30
	3500K		35
	4000K		40
	5000K		50
REFERENCE	SD010	A	BK 22

↓ MOUNTING NOMENCLATURE

Mounting spec.	Mounting recessed Ø43	ACSFIPATER43	ENCC
	Mounting recessed Ø60	ACSFIPATER60	ENCAC
	Mounting ceiling Ø50	ACSFIPATER50	APPC
	Mounting ceiling X1spot	ACSFIPA1704030	AP1C
	Mounting ceiling X2spot	ACSFIPA1704030	AP2C
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE		ACSFIPATER43	BK ENCC

↓ RCA TRIM NOMENCLATURE

Product reference		ACSDRCA	APPC
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE		ACSDRCA	BK APPC

↓ NOMENCLATURES PATERE RCA TRIMLESS

Référence produit		ACSDRCA	ENCC
-------------------	--	---------	------

↓ NOMENCLATURE OF OPTICAL ACCESSORIES

Product Ref.	ACSD10		
Specification	Framer	CADRE	
	Wallwasher	WALLW_C	
	Zoom	LENSF10C	
	Inter. lens (10°)	PORTL_10C	
	Inter. lens (15°)	PORTL_15C	
	Inter. lens (25°)	PORTL_25C	
	Inter. lens (35°)	PORTL_35C	
	Inter. lens (ELL)	PORTL_ELC	
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE		ACSD10	CADRE BK


Spot D10

MOUNTING CONFIG.


REF : SD010

SPOTS EN


↓ MOUNTING CONFIGURATION




SD010P
Piccolo track Width 27mm



SD010SMA
Slim track Width 13mm




SD010RV
220 0-10V track Width 31mm



SD010RD
220 DALI track Width 31mm



SD010ARCA
RCA



SD010A
Simple peg
Ø35mm H21mm

Spot D10

REF : SD010

SPOT EN


ORDER REFERENCE

ORDER REFERENCE (MOUNTING NOMENCLATURE)




SD010-A-BK-27
Spot D10 - Peg -
Black(BK) - 2700K(27).

+




ACS FIPATER43XXENCC
Fixing mounting recessed
Ø43mm H34mm

or



ACS FIPATER60XXENCAC
Fixing mounting recessed
Ø60mm H34mm

or



ACS FIPATER50XXAPPC
Fixing mounting ceiling
Ø50mm H30mm

or



ACS FIPA1704030XXAP1C
Fixing mounting ceiling
(driver in)
x1 spot : 170x40x30mm

or



ACS FIPA1704030WHAP2C
Fixing mounting ceiling
(driver in)
x2 spots : 170x40x30mm

ORDER REFERENCE (RCA TRIM NOMENCLATURE)



SD010-ARCA-BK-27
Spot D10 - RCA -
Black(BK) - 2700K(27).

+



ACS DRCA BK APPC
Mounting RCA trim - Black(BK)
(Ø50mm)

=



ORDER REFERENCE (RCA TRIMLESS NOMENCLATURE)



SD010-ARCA-BK-27
Spot D10 - RCA -
Black(BK) - 2700K(27).

+



ACS DRCA ENCC
Mounting RCA trimless

=




Spot D10

ACCESSORIES

REF : SD010


SPOT EN

↓ RCA ACCESSORIES



ACSDRCABOUCHONXXC
Finishing cap for RCA trim &
trimless mounting

↓ POWER SUPPLY CONNECTORS




ACSD010COCIRCPXX500
Piccolo circuit with sheath
heat-shrinkable


↓ OPTICAL ACCESSORIES




ACSD10CADREXXC
Framer



ACSD10LENSF10C
Zoom



ACSD10PORTLXXXC
Interchangeable lenses



ACSD10WALLWXXC
Wallwasher



ACSD10OPTFILBKELC
Oval filter



ACSD10OPTFILBKC-C
CTO- filter



ACSD10OPTFILBKC+C
CTO+ filter