


WR6

trim

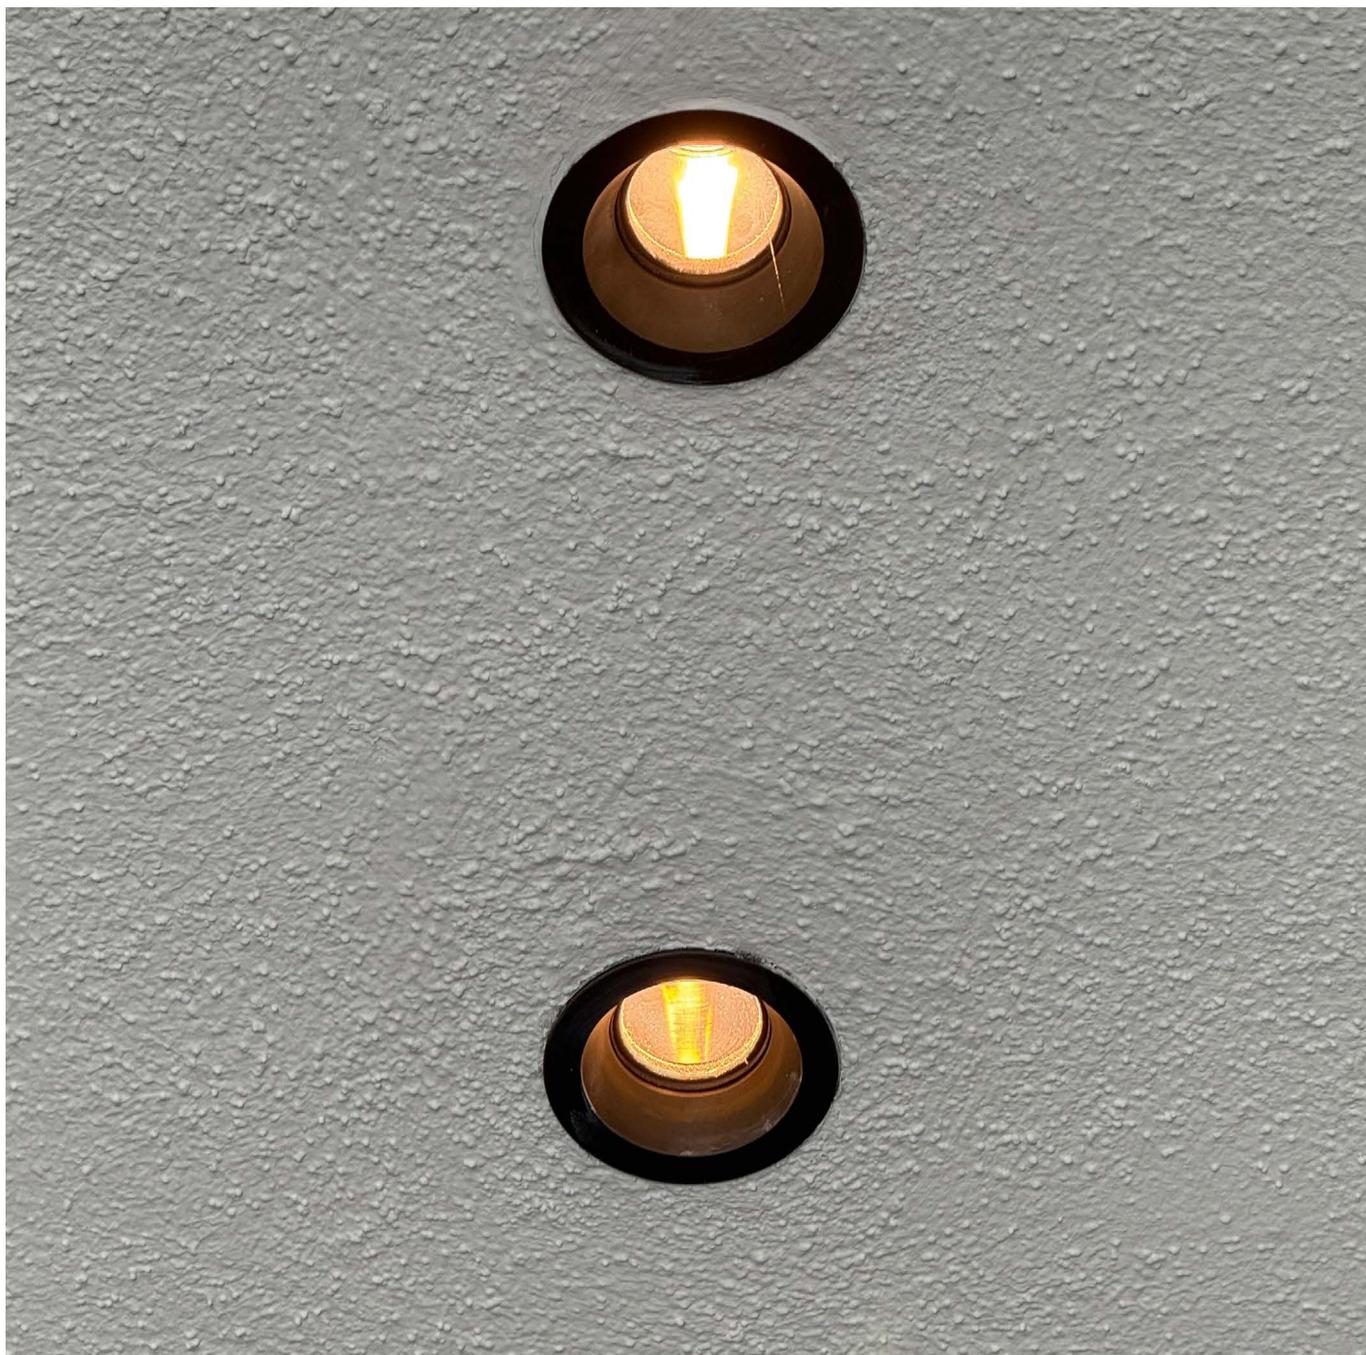

WR6




The elegance of hidden light

WR6 è un faretto a incasso IP65 dal design minimalista, progettato per offrire un'illuminazione raffinata e performante. Il corpo completamente incassato mantiene ottica e rifrazione interamente interne, garantendo un'esperienza visiva estremamente confortevole e priva di abbagliamento. Realizzato con materiali di altissima qualità, è disponibile in una gamma di finiture pregiate. Grazie al grado di protezione IP65, WR6 è perfetto per installazioni in ambienti esterni e saune, assicurando resistenza e affidabilità anche nelle condizioni più esigenti.

info@turnlights.it / turnlights.com

WR6 is a recessed IP65 spotlight with a minimalist design, engineered to deliver refined and high-performance lighting. Its fully recessed body keeps the optics and refraction entirely internal, ensuring an extremely comfortable, glare-free visual experience. Crafted from premium-quality materials, it is available in a range of elegant finishes. Thanks to its IP65 protection rating, WR6 is perfect for outdoor and sauna installations, guaranteeing durability and reliability even under the most demanding conditions.

MADE IN ITALY

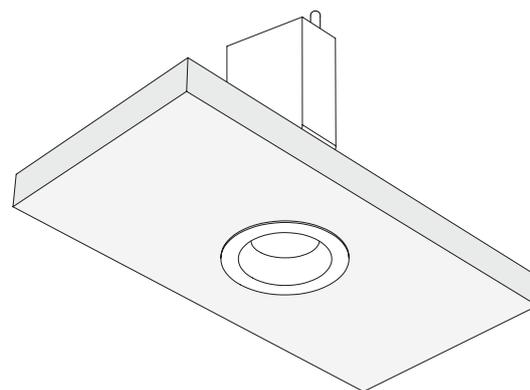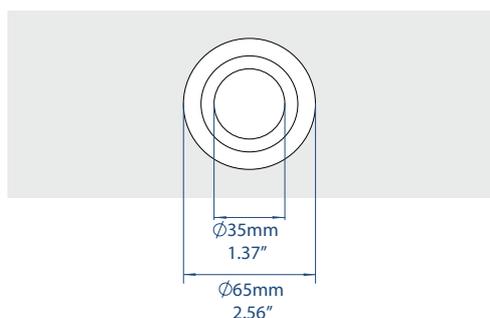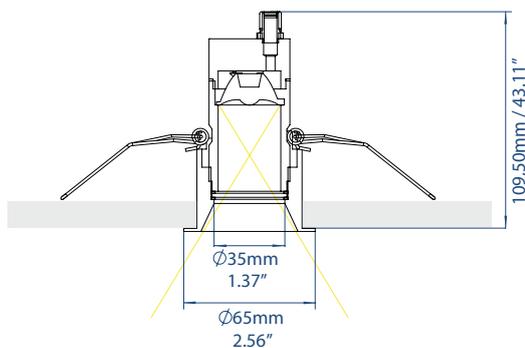

CARATTERISTICHE / FEATURES

tipo di installazione
type of intallation

incasso
recessed

materiali
materials

corpo in ottone, dissipatore in alluminio, lente in PMMA, vetro extrachiaro
brass body, aluminum dissipator, PMMA lens efficiency, extra-clear glass

dimensioni complessive
overall dimensions

65x109,5mm
2,56x43.11"

peso
weight

320g

fascio
beam angle

16° / 24°

finiture
finishes

finiture bianco, bronzo e nero disponibili
white, bronze and matte black finishes available



Bianco
White

Bronzo
Bronze

Nero opaco
Matt black

SPECIFICHE ELETTRICHE / ELECTRICAL DATA

Volt voltage	max 130mA / 36Volt - for sauna installation: max 80mA Option: 24volt dc/dc converter 36Volt-150mA"
dimmerazione dimming	sì, a richiesta yes, on request

SORGENTE LUMINOSA / LIGHT SOURCE

tipo di fonte type of source	COB LED Hi CRI> 98
potenza power	5W max - 3W max per installazione sauna / 3W max for sauna installation
flusso luminoso luminous flux	468lm - 280lm
intensità peak intensity	3258 cd - 1955 cd
temperatura di colore color temperature	2700K / 3000K / 3500K / 4000K / 5000K CRI>98 su richiesta 2200K / 5000K CRI>90 on request 2200K / 5000K CRI>90
fidelity index (Rf)	>98
gamut index (Rg)	>101,7
selezione cromatica chromatic selection	MAC-ADAM 1Step
lifetime	>50 000h Flusso>70% >50 000h Flux>70%

MISURAZIONI FOTOMETRICHE / PHOTOMETRIC MEASUREMENTS

CERTIFICAZIONI / CERTIFICATIONS

IP 20 CLASSE II CEI 34-21



**MADE
IN
ITALY**

TRANSPORT CONDITIONS: Ambient temperature 0°C - +35°C; Relative Humidity 5% - 70% Rh.
STORAGE CONDITIONS: 0°C - 40°C; Humidity relative 5%-70% Rh, No dew, No Water spray. Recommended storage Temp is: 25°C with Humidity <65% Rh.
OPERATIONAL ENVIRONMENTAL CONDITIONS: Ambient temp : +5°C - 35°C Relative Humidity : 20% - 75% Rh


il materiale non può essere modificato, copiato, riprodotto o trasferito, né utilizzato in maniera impropria / the material can not be modified, copied, reproduced or transferred neither used improperly

info@turnlights.it / turnlights.com


REVISIONE / REVISION 11/2024
soggetto a modifiche senza preavviso
subject to change without prior notice

ACCESSORI / ACCESSORIES

Micro connettore M/F antistrappo - 28xØ9mm - 24Volt
 Micro plug connector M/F tearproof - 28xØ9mm - 24Volt



Collegamento a raccordo fisso
 Hardwire connection




Drivers
 (standard driver 24 Volt / DALI / 1-10V / DMX/RMX)


lep / lep DALI
 (USA only)

INDICAZIONI INSTALLAZIONE / INSTALLATION DIRECTIONS

1_CONNETTI I PLUG 1_CONNECT THE PLUG

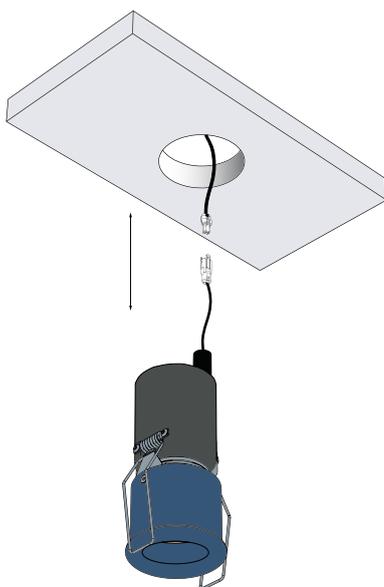

2_ALZA LE MOLLE PER INSERIRE LO SPOT 2_LIFT THE SPRINGS TO INSERT THE SPOT

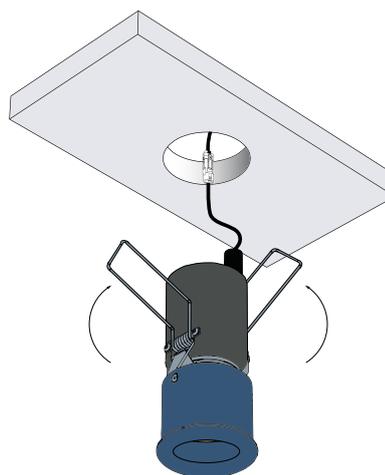

3_POSIZIONA LO SPOT 3_PLACE THE SPOT

